

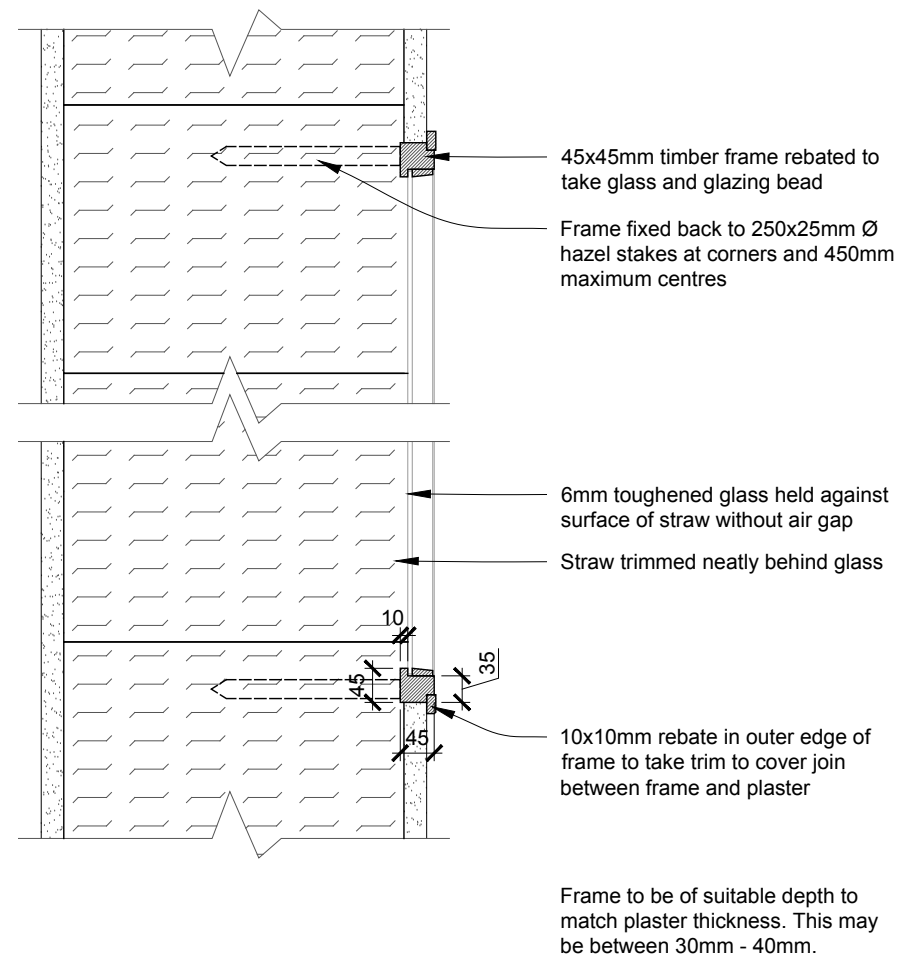





**Strawbale wall construction:** 460mm bales trimmed either side to 450mm with lime render externally & lime or clay internally. Render/plaster coats should be minimum 30mm thick in 2 or 4 layers depending on required finish.



### Alternative Profiles and Finishes for Frame



x = depth of plaster